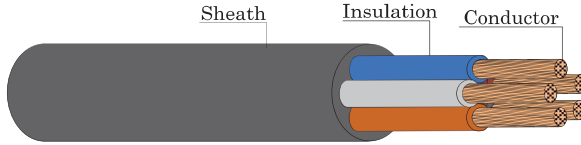


300/500 V 90 °C FLEXIBLE CONDUCTOR PVC INSULATED AND SHEATH, ROUND TYPE

 TIS 11 Part 5-2553


CABLE STRUCTURE

Conductor	: Flexible annealed copper : Sizes 0.75 mm ² up to 2.5 mm ²
Insulation	: Polyvinyl chloride (PVC/E)
Core identification	
2 Cores	: Blue and Brown
3 Cores	: Brown, Black, Grey or Blue, Brown and Green/Yellow
4 Cores	: Blue, Brown, Black and Grey or Brown, Black, Grey and Green/Yellow
5 Cores	: Blue, Brown, Black, Grey and Black or Blue, Brown, Black, Grey and Green/Yellow
Sheath	: Black polyvinyl chloride (PVC/ST10)

TECHNICAL DATA

Classification	: Maximum conductor temperature 90°C : Circuit voltage not exceeding 300/500 Volts
Rated voltage	: 300 Volts between Line to Earth : 500 Volts between Line to Line
Testing voltage	: 2,000 Volts
Reference standard	: TIS 11 Part 5-2553 Table 13

APPLICATION

For household appliances, electrical equipment and electrical illumination.

Number of cores	Nominal cross sectional area (mm ²)	Conductor type	Insulation thickness nominal (mm)	Outer sheath thickness nominal (mm)	Overall diameter		Conductor resistance at 20°C maximum (Ω/km)	Insulation resistance at 90°C minimum (MQ-km)	Continuous current rating in free air at 40°C maximum (A)	Cable weight approx. (kg/km)	Standard Length (m)
					Minimum (mm)	Maximum (mm)					
2	0.75	Flexible	0.6	0.8	5.7	7.2	26.0	0.011	6	57	100/C
	1	Flexible	0.6	0.8	5.9	7.5	19.5	0.010	10	66	100/C
	1.5	Flexible	0.7	0.8	6.8	8.6	13.3	0.010	16	89	100/C
	2.5	Flexible	0.8	1.0	8.4	10.6	7.98	0.009	25	135	100/C
3	0.75	Flexible	0.6	0.8	6.0	7.6	26.0	0.011	6	66	100/C
	1	Flexible	0.6	0.8	6.3	8.0	19.5	0.010	10	78	100/C
	1.5	Flexible	0.7	0.9	7.4	9.4	13.3	0.010	16	110	100/C
4	0.75	Flexible	0.6	0.8	6.6	8.3	26.0	0.011	6	80	100/C
	1	Flexible	0.6	0.9	7.1	9.0	19.5	0.010	10	99	100/C
	1.5	Flexible	0.7	1.0	8.4	10.5	13.3	0.010	16	140	100/C
	2.5	Flexible	0.8	1.1	10.1	12.5	7.98	0.009	20	205	100/C
5	0.75	Flexible	0.6	0.9	7.4	9.3	26.0	0.011	6	99	100/C
	1	Flexible	0.6	0.9	7.8	9.8	19.5	0.010	10	120	100/C
	1.5	Flexible	0.7	1.1	9.3	11.6	13.3	0.010	16	170	100/C
	2.5	Flexible	0.8	1.2	11.2	13.9	7.98	0.009	20	250	100/C

C = Packing in coil